

INSTALLATION INSTRUCTION

Item# P1284-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

1. Shut off the power at the fuse box or circuit breaker box and, if necessary, remove the old fixture, including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Shut off the power at the fuse box or circuit breaker.

ASSEMBLING THE FIXTURE(Fig.1)

4. Adjust to desired height of lamp body cable, then use strain relief (E) to prevent pulling at the outlet of lamp body.

MOUNTING THE FIXTURE (Fig.1)

5. Thread two mounting screws (A) (Size: #8-32*1.2"L) into circular strap (B) spaced same distance apart as holes in canopy (F). Length of mounting screws (A) into circular strap (B) may be adjusted if necessary. Attach circular strap (B) to junction box (Not included) using junction box screws (C) (Size: #8-32*0.6"). The side of circular strap (B) marked "GND" must face out.
6. The support cable is provided to support the weight of fixture while wiring. Attach hook (D) on the end of support cable to circular strap (B). Carefully allow support cable to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect ground wires to it. Otherwise, connect ground wire directly to circular strap (B) using green screw provided.
8. After wires are connected, tuck them neatly inside junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Slide canopy (F) over mounting screws (A) and secure with cap nuts (G).
10. Install crystal glass (K) into light cup (H), and secure with screws (I) using wrench (J) (Provided).
Note: Provided are two sets of screw sizes (lengths of 11mm and 12mm) for flexible assembly to accommodate the crystal holes.

Your installation is now complete. Return power to the junction box and test the fixture.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

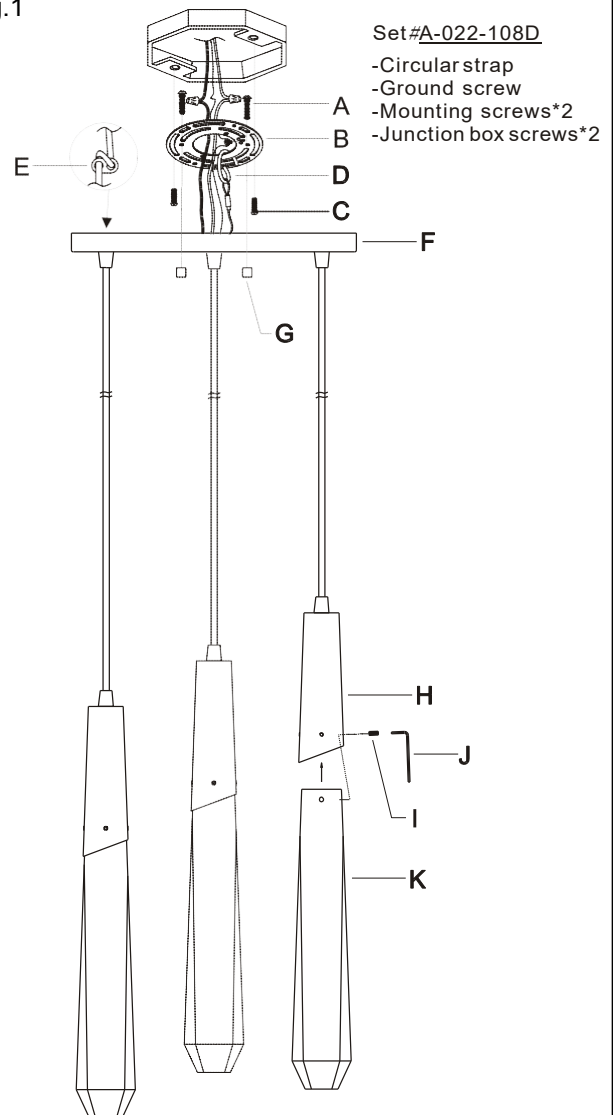


Fig.2

