

INSTALLATION INSTRUCTIONS

Item#2635-732 (Convertible Lamp for Semi Flush Mount)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 3)

1. Secure rod (F3) into all thread (I) on top of housing.
2. Position mounting plate (B) on ceiling and mark location of three drywall anchors (A). Pre-drill holes for drywall anchors (A). Then insert drywall anchors (A) into ceiling.
3. Attach mounting plate (B) to junction box (Not included) with mounting screws (D) (Size: #8-32N*L0.5") and wood screws (G) into drywall anchors (A). The side of mounting plate (B) marked "GND" must face out.
4. The support cable is provided to support the weight of fixture while wiring. Align fixture to mounting plate (B) and attach hook (H) on the end of support cable (N) and a slot located on mounting plate (B). Carefully allow support cable (N) to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (B) using the green screw provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 4)

7. Place canopy (E) over mounting plate (B) and secure with screws (C).
8. Install (5) five candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Hold glass balls (K) up to the connector (J) and rotate clockwise until secured. Do not over tighten. (Note: Install the inner glasses first and then install the outer glasses to prevent glasses from breaking when installation)
10. Adjust cable length while pushing on wire strainer to desired height.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 3) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Fig. 3

Set#A-021-165D

-Mounting Plate

-Ground Screw

-Mounting Screw *2

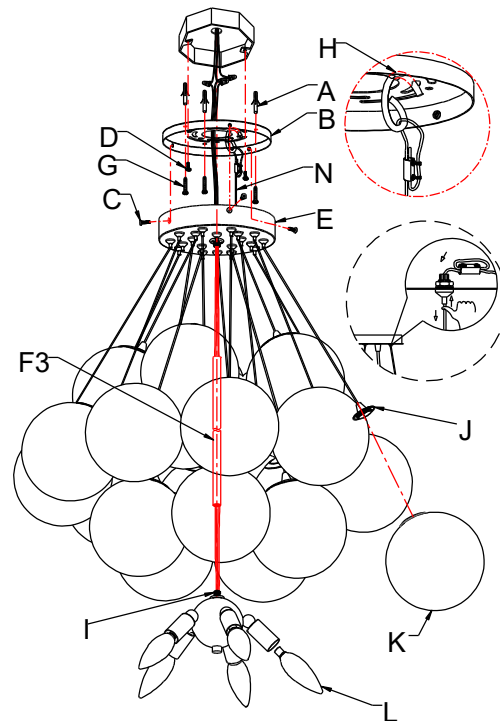

Rod# W30-H-732 *1 (F3)