

INSTALLATION INSTRUCTIONS FOR 135-855 136-855

For PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
4. Secure the pipe (H) to the all thread (I) inside the shade (J) tightly.
5. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (G1/G2) to the pipe (H). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
6. Secure rods to the swivel (F) of canopy (D).

CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (B) provided.
8. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

9. Align the canopy (D) onto mounting plate (A) and secure with screws (E).
10. Install (1) one medium base bulb up to 100 watts or CFL or LED equivalent (Not included), in accordance with the fixture specification **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSNCE NOMINALE MAXIMLE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1


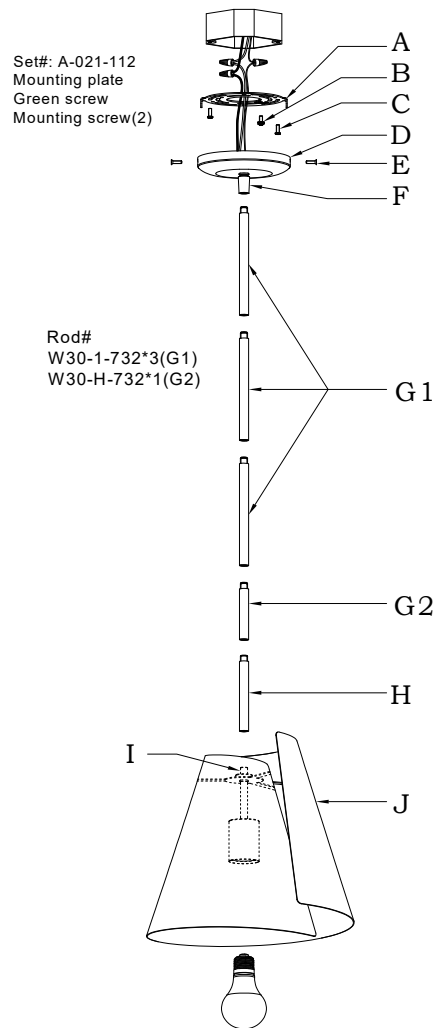


Fig.2

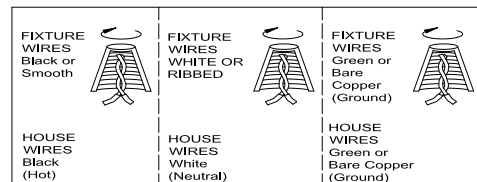

135-855
136-855