

INSTALLATION INSTRUCTIONS

Item#3787-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Determine desired hanging height and thread rods (I and H) to coupling on fixture body (J). Pass wires carefully through each rod as you assemble.

4. Secure the fixture loop (G) onto rod (H), attach quick link (F) to fixture loop (G) and the loop on canopy (C). Note: The quick link (F) must be fully closed.

5. Install the crossbar (A) with nipple (D), lock nut (M) to the junction box using two junction box screws (B). The side of mounting plate marked "GND" must face out. The length of nipple (D) maybe adjusted if necessary. Then tighten with lock nut (M) provided.

6. Insert the fixture wires up through the fixture loop (G), quick link (F), canopy (C) and nipple (D).

7. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to crossbar (A) and attach hook (P) on end of support cable (O) into a slot located on crossbar (A). Carefully allow the support cable (O) to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

8. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the crossbar (A) using the green screw (E) provided.

9. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

10. Raise the canopy (C) to the ceiling and secure in place by screwing the cylinder nut (N) onto the nipple (D).

11. Install (4) four candelabra base bulbs (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification

—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

12. Screw glass shade (L) over the socket in the fixture body (J). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set#A-016

-Crossbar

-Ground Screw

-Junction Box Screw*2

Rod#

W32-H-732(H-6")

W32-1-732 X 3 (I-12")

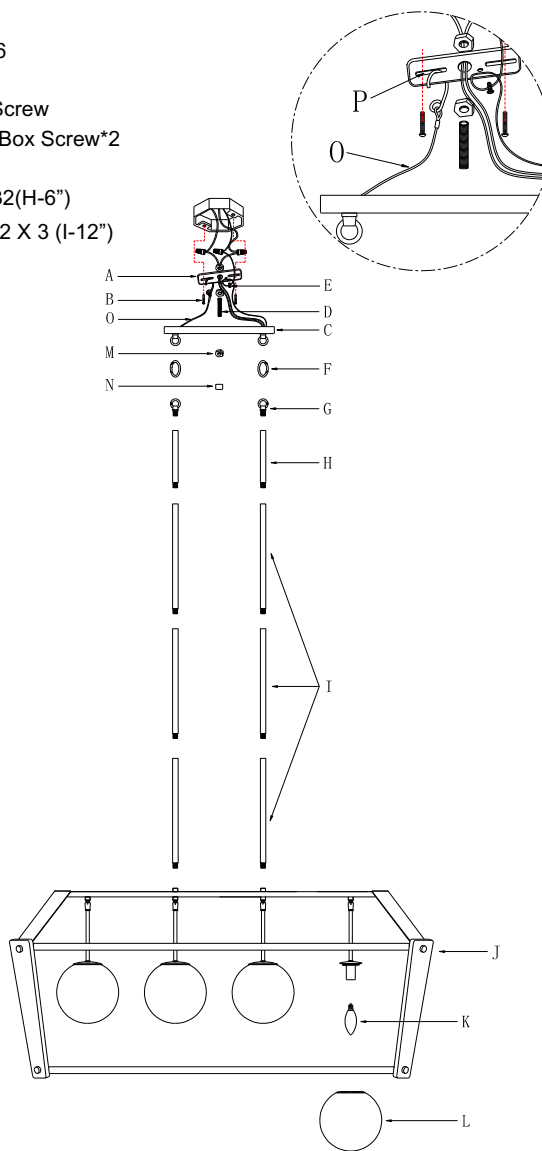


Fig. 2







Fig.3

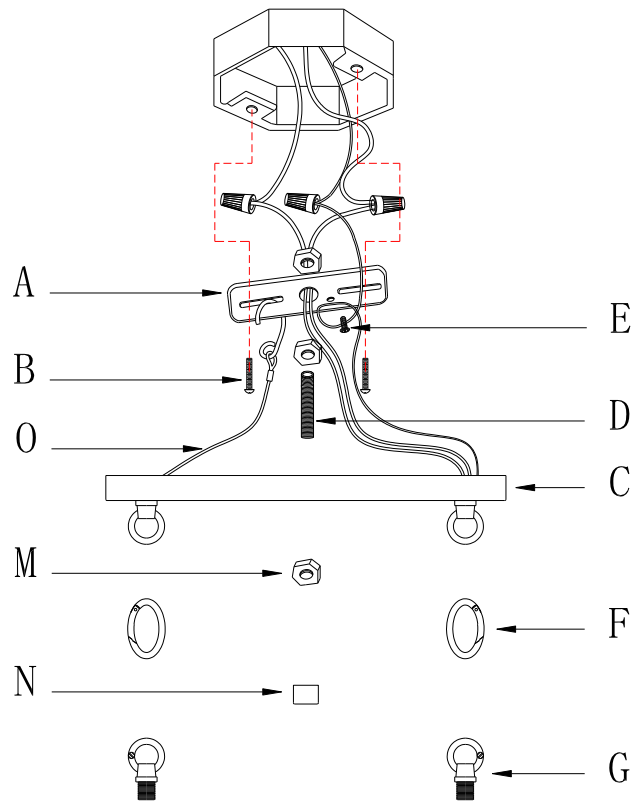

a. Hardware Bag:

- A. Crossbar*1
- B. Junction Box Screw*2
- C. Canopy *1
- D. Nipple*1
- E. Ground screw*1
- F. Quick link*2
- G. Fixture loop*2
- M. Lock nut*3
- N. Cylinder nut*1

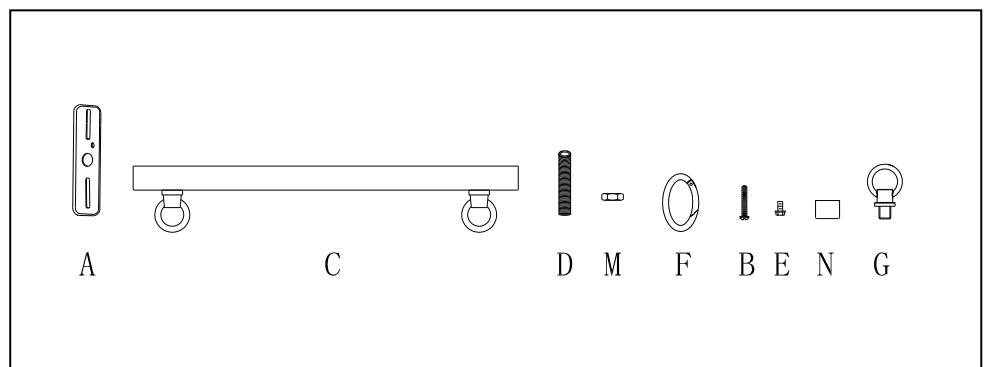

b. Hardware Bag:

- I. ROD 12"*6
- H. ROD 6"*2

