

INSTALLATION INSTRUCTIONS

Item# 8186-66A-L (New. 2023/12/08)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Install a 1/4" IPS pipe (Not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown in (Fig.1).
4. Secure hex nut (G) onto pipe and then secure hickey (H) tightly.
5. Determine the desired hanging height and thread rods (M & L) to coupling on fixture (N). Carefully feed wires through each rod as you assemble. Note: Remove the all thread, if installing with one 6" rod only. Each rod pre-assembled a washer.
6. Attach fixture canopy (J) by threading onto rod (L).
7. Position mounting plate (A) on the wall and mark location of the four mounting holes. Pre-drill the holes for plastic anchors (E). Insert plastic anchors (E) into wall.
8. Thread canopy screws (B) into pre-drilled holes in mounting plate (A). Spaced same distance apart as holes in canopy (J), and secure with the nuts (D) provided. The length of canopy screws (B) may be adjusted if necessary.
9. There's one driver inside canopy, connect driver output wire to LED wire as listed below. Secure with wire connectors (O).
 - Red driver output wire (labeled OUTPUT+) to red LED wire (labeled LED+)
 - Yellow driver output wire (labeled OUTPUT-) to yellow LED wire (labeled LED-).
10. Feed fixtures wires and safety cable through mounting plate (A) and allow safety cable to exit through the side of hickey (H). Run safety cable through hickey (H) one circle and secure safety cable with set screw assembly (I) provided. (Fig.1)
11. Attached mounting plate (A) to outlet box (Not included) using mounting screws (C) (Size: #8-32N*L1"). The side of mounting plate (A) marked with "GND" must face out. Secure mounting plate (A) by inserting wood screws (F) through holes on mounting plate into the plastic anchors (E).

CONNECTING THE WIRES (Fig. 2)


12. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the ground screw provided.
13. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)

14. Raise canopy (J) over canopy screws (B) and secure with finials (K).

Fig. 1

Set# A-020-140A
-Mounting Screw*2
-Ground Screw
-Mounting Plate
6" Rod# W35-H-66A
12" Rod# W35-1-66A
Acrylic shade (Inner)# GP8186-2
Acrylic shade (Outer)# GP8186-1

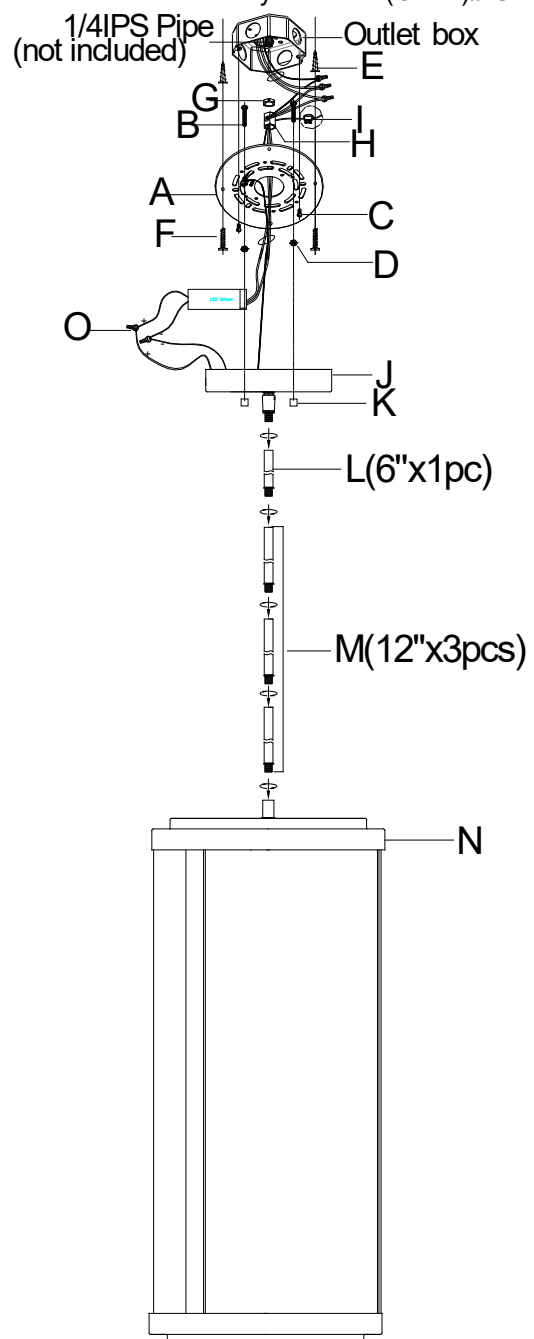

Page 1/2



8186-66A-L

Note: The LED module should be provided by a specified supplier.

This fixture is suitable for wet location applications.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

