

INSTALLATION INSTRUCTIONS

Item#1458-XXX (New. 11/30/2023)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE WITH CHAIN LOOP (Fig.1)

3. Secure tube (M) into all thread (I) of fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread on tube (M). Then thread loop (H1) to rod (F1). Carefully pass wires through each rod as you assemble.
5. Attach quick link (G) to loop (H1) and loop (H2) on canopy (D). Carefully feed wire through loop (H1), quick link (G) and loop (H2).
6. Thread screws (A) into the pre-drilled holes in circular strap (B) spaced same distance apart as holes in canopy (D). The length of screws (A) may be adjusted if necessary.
7. Attach circular strap (B) to junction box (Not included) with mounting screws (C) (Size: #8-32N*L0.5"). The side of circular strap (B) marked "GND" and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to circular strap (B) using green screw provided.
9. Tuck wire connectors neatly into junction box and raise canopy (D) to ceiling.

COMPLETING THE INSTALLATION (Fig. 1)


10. Slide canopy (D) over screws (A) and secure with knobs (E).
11. Place candle cover (K) over socket (L) of fixture body.
12. Install (4) four candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-020
-Circular Strap
-Ground Screw
-Mounting Screw *2

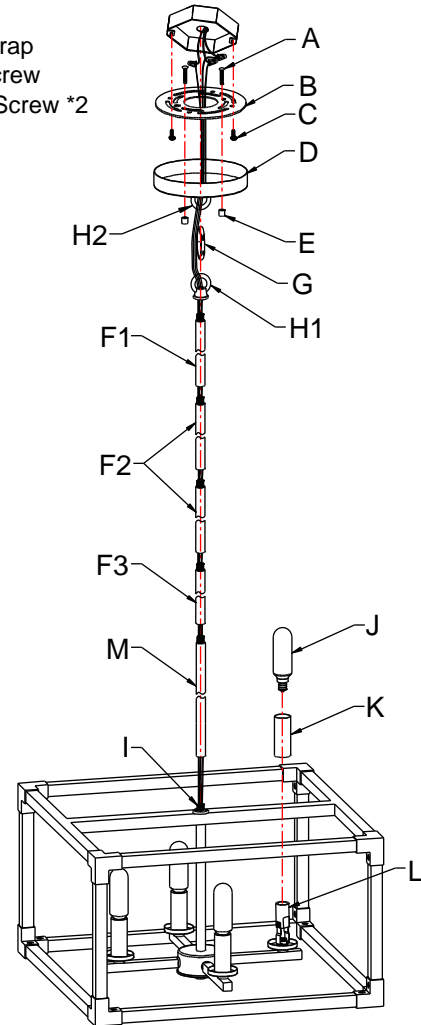

Rod# W30-1-695 *1(F1)


W30-1-695 *2(F2)

W30-H-695 *1(F3)

Candle cover# CCV21055P-695


Fig. 2

FIXTURE WIRES
Black or Smooth




HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
White or Ribbed



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Bare Copper
(Ground)



HOUSE WIRES
Green
(Ground)