

INSTALLATION INSTRUCTIONS

Item# N1909-785/ N1909-792

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small parts necessary for installation.
3. Your fixture is supplied with 2 sizes of stem, 1x 6" and 5x 12".
4. To begin assembly of your fixture, first connect the stems (J4 & J5, and thread onto threaded tube (1). Determine the desired hanging height and thread rods (J1, J2, J3, & K) with the fixture loop (I) and tighten.
5. Carefully pass wires through each rod during assembly.

HANGING THE FIXTURE (Fig. 2)

6. Install 1/4IPS pipe (**not provided**) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box (**not provided**) as shown. Secure the hickey (A) to the 1/4IPS pipe with hex nut (C).
7. Secure the hex nut (C) and washer (B) onto all thread (D), then thread all thread (D) into the hickey (A); and secure with hex nut (C) and washer (B) on the other end of all thread (D).
8. Thread ceiling loop (E) onto all thread (D) tightly. The all thread length maybe adjusted if necessary.
9. Slip the collar ring (G) and canopy (F) over the loop.
10. Open quick link (H) and connect to loops (E/I). Then closed quick link.
11. Feed the fixtures wires and safety cable through the ceiling loop (E) and all thread (D) and allow them to exit through the side of hickey (A).
12. Run safety cable through hickey (A) open hole and secure safety cable with set screw assembly and set screw.

CONNECTING THE WIRE (Fig. 3)

14. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, consult with the professional electrician.
15. Tuck wire connections neatly into junction box (JB).
16. Raise canopy (F) over ceiling loop (E) and secure with collar ring (G).

FINISHING THE FIXTURE (Fig. 1)

17. Put rubber washer (RW) to all the pedals and thread all the pedals (L) onto frame (2).
18. Install 20x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

FIG. 1

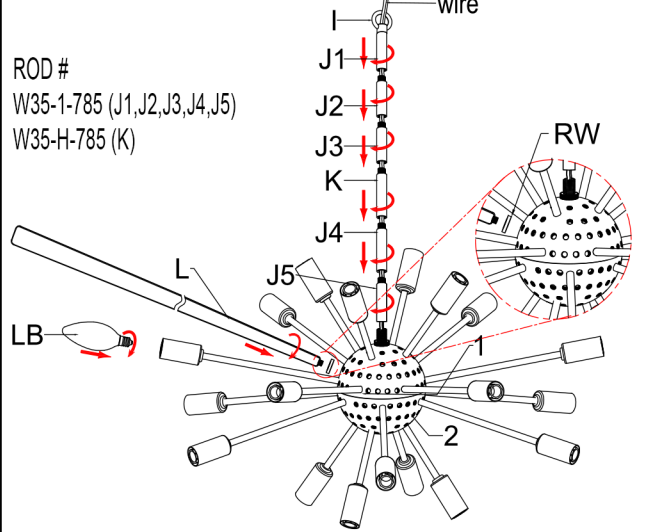


FIG. 2


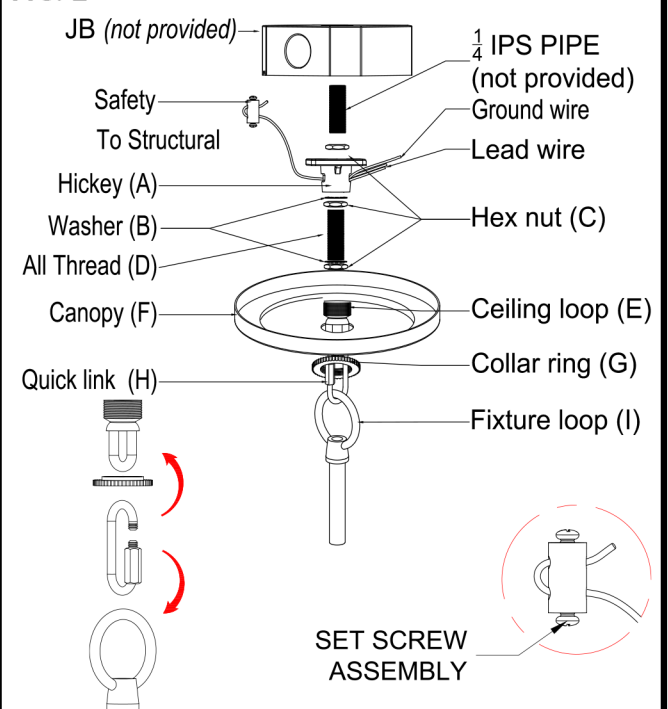


Fig. 3

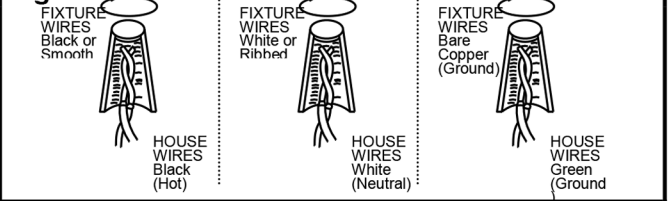

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

WARNING: This luminaire must be mounted or supported independently of an outlet box.