

# INSTALLATION INSTRUCTIONS

For P1499-66A-L

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture from carton and check that all parts are included as shown in illustration.
3. Install 1/4" IPS pipe (Not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown. Thread hickey (H) on the 1/4" IPS Pipe and tighten with hex nut (F).
4. Loosen mounting screw (K) to remove mounting plate (C) from canopy (J). Position mounting plate (C) on ceiling and mark location of the three mounting holes. Pre-drill holes for plastic anchors (I). Insert plastic anchors (I) into ceiling.
5. Feed fixture wires and safety cable (G) through mounting plate (C) and allow safety cable (G) to exit through the side of hickey (H). Run safety cable (G) through the hickey (H) one circle and secure safety cable (G) with set screw assembly (D) provided.
6. Attach mounting plate (C) to outlet box (A) (Not included) using outlet box screws (E) (Size: #8-32\*1/2"L). The side of mounting plate marked "GND" must face out.
7. Secure mounting plate (C) by screwing wood screw (L) through holes on mounting plate (C) into plastic anchors (I).

## CONNECTION THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using ground screw (N) provided.
9. Tuck wire connectors neatly inside outlet box.

## FINISHING THE INSTALLATION (Fig. 1)

10. Align canopy (J) to mounting plate (C) and secure with mounting screws (K).
11. Adjust the length of cable (O) while pushing on wire strainer to desired hanging height.
12. Place plastic tube (T) inside hole of crystal (P & R), put screw (S) through plastic tube (T). Secure crystal (P & R) with screw (S) into the extrusion crisscross on frame.

Your installation is now complete. Return power to the outlet box and test the fixture.

**CAUTION / ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or fixture body only.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**Warning:** This luminaire must be mounted or supported independently of an outlet box.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig. 1

### Mounting Plate Set #:

A-021-293D for P1499-66A-L

- Mounting Plate (C)
- Ground Screw (N)
- Outlet Box Screw\* 2 (E)

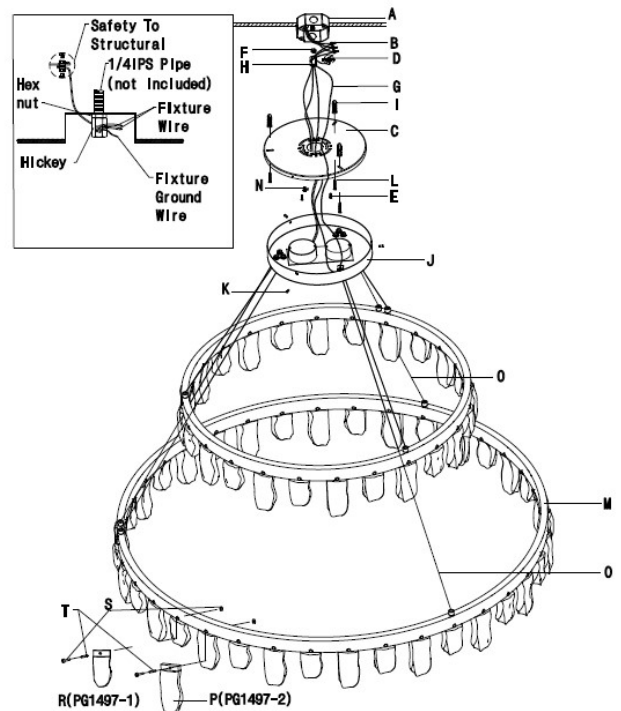


Fig. 2

