

INSTALLATION INSTRUCTIONS

Item#2083-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine the desired hanging height and select the correct rods (H,I,J and K). Carefully push fixture wires from top of fixture up through the rods (H,I,J and K), screw the rods onto all thread (L) of the frame (P). Slip collar ring (G) and canopy (F) down over end of rods (H,I,J and K). Pass the fixture wires through swivel (E), collar screw (D) and nipple (C), thread swivel (E) onto the rods, thread nipple (C) of crossbar assembly into collar screw (D). Place the decorative ring (M) on top of frame (P), please note that the decorative ring (M) needs to be leaned against the frame first. Do not lock the ring before installing the decorative sheets (O).
4. Attach crossbar assembly to the junction box (not included) with mounting screws (B) (Size: #8-32N*L1/2"). The side of the crossbar (A) with "GND" marked on it and two convex points must face out. The length of nipple (C) into crossbar (A) maybe adjusted if necessary.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar(A) using green screw provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Raise canopy (F) up to ceiling, then secure with collar ring (G).
8. Install (3) three medium base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Attach the decorative sheets (O) to the frame (P). Secure decorative ring (M) by using screws (N) provided.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set#A-010-C

-Crossbar

-Ground screw

-Mounting screws (2)

Rod#W30-H-732 (6")

Rod#W30-1-732 (12")


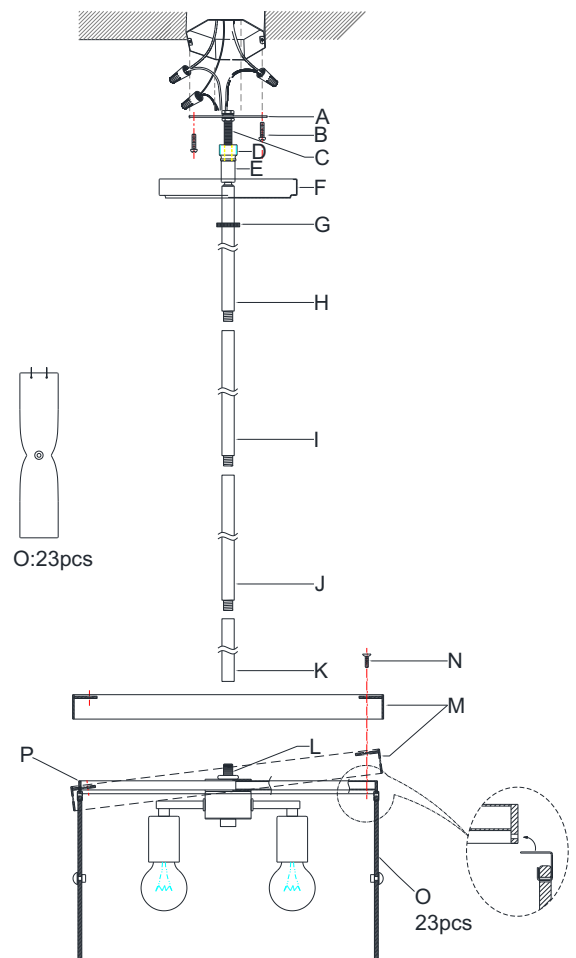


Fig. 2

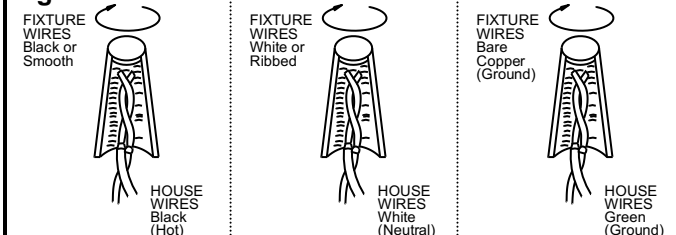

For Ceiling version (Fig.3)

10. Carefully push fixture wires from top of fixture up through the rod (Q), screw the rod (Q) onto all thread (L) of the frame (P). Slip collar ring (G) and canopy (F) down over end of rod(Q). Pass the fixture wires through swivel (E), collar screw (D) and nipple (C), thread swivel (E) onto the rod (Q), thread nipple (C) of crossbar assembly into collar screw (D). Place the decorative ring (M) on top of frame (P), please note that the decorative ring (M) needs to be leaned against the frame first. Do not lock the ring before installing the decorative sheets (O).
11. Attach crossbar assembly to the junction box (not included) with mounting screws (B) (Size: #8-32N*L1/2"). The side of the crossbar (A) with "GND" marked on it and two convex points must face out. The length of nipple (C) into crossbar (A) may be adjusted if necessary.
12. Repeat step 5-9 to complete the installation.

Fig.3

