

INSTALLATION INSTRUCTIONS

For Item#2637-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Remove metal screw (C) from metal bushing (I). Determine the desired hanging height by pushing or pulling cord through the center of metal bushing (I). Adjust the cable length to desired height and level by pushing on wire strainer.
4. Secure the cord by tightening metal screw (C) into the metal bushing (I). Cut excess wire leaving appropriate length of the cord for the electrical connections.
5. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose the copper strands.
6. Position mounting plate (B) on ceiling and mark location of two drywall anchors (A). Pre-drill holes for drywall anchors (A). Then insert drywall anchors (A) into ceiling.
7. Install a 1/4" IPS pipe (M) (Not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the junction box (Not provided) as shown in Fig.1.
8. Secure hex nut (P) onto 1/4" IPS pipe (M) and secure hickey (Q) tightly.
9. Feed the safety cable through the mounting plate (B) and allow safety cable to exit through the side of hickey (Q). Run safety cable through the hickey (Q) one circle and secure safety cable with set screw assembly and set screw (Provided).
10. Attach mounting plate (B) to junction box (Not included) with mounting screws (D) (Size: #8-32N*L0.5") and wood screws (G) into drywall anchors (A). The side of mounting plate (B) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

11. Connect electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (B) using green screw provided.
12. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

13. Place canopy (E) over mounting plate (B) and secure with screws (F).
14. Install (12) twelve candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
15. Hold glass balls (K) up to the connector (J) and rotate clockwise until secured. Do not over tighten. (Note: Install the inner glasses first and then install the outer glasses to prevent glasses from breaking when installation)
16. Adjust cable length while pushing on wire strainer to desired height.
17. Adjust cable length while pushing on wire strainer to desired height.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-021-714116
-Mounting Plate
-Ground Screw
-Mounting Screw *2

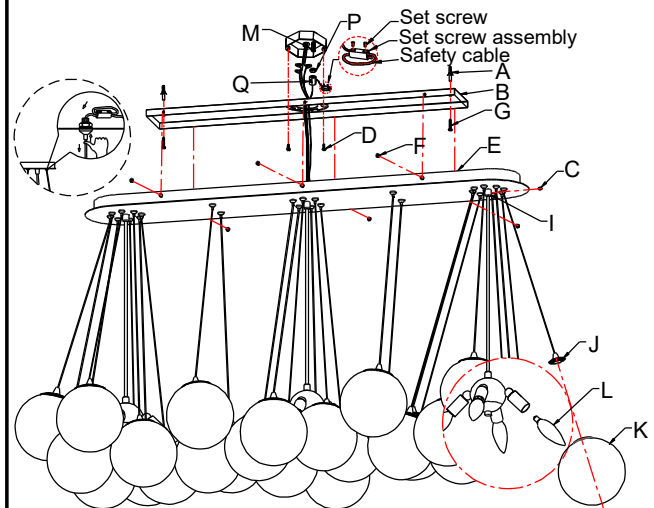


Fig. 2

