

INSTALLATION INSTRUCTIONS

Item#2745-695/66A (New. 08/01/2022)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Loosen set screws (K), adjust the length of the wire, and then tighten the set screws (K).
4. Thread screws (B) into pre-drilled holes in mounting plate (G) spaced same distance apart as holes in canopy (I) and tighten with nuts (E). The length of screws (B) may be adjusted if necessary.
5. Attach mounting plate (G) to junction box (not included) using mounting screws (D). The side of mounting plate (G) marked "GND" must face out.

CONNECTING THE WIRES (Fig.2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors (C) are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (G) using the green screw provided.
7. Tuck wire connectors neatly into the junction box.

FINISHING THE INSTALLATION (Fig.1)

8. Place canopy (I) onto screws (B) and secure with finials (A).
9. Install (5) five medium (A19) bulbs up to 40 watts each (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
10. Install Glass (H) on fixture (F). Don't overtighten.
11. To straighten the cord, please use a blow dryer (not included) if necessary.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set# A-016

- Mounting Plate

- Ground Screw

- Mounting Screw*2


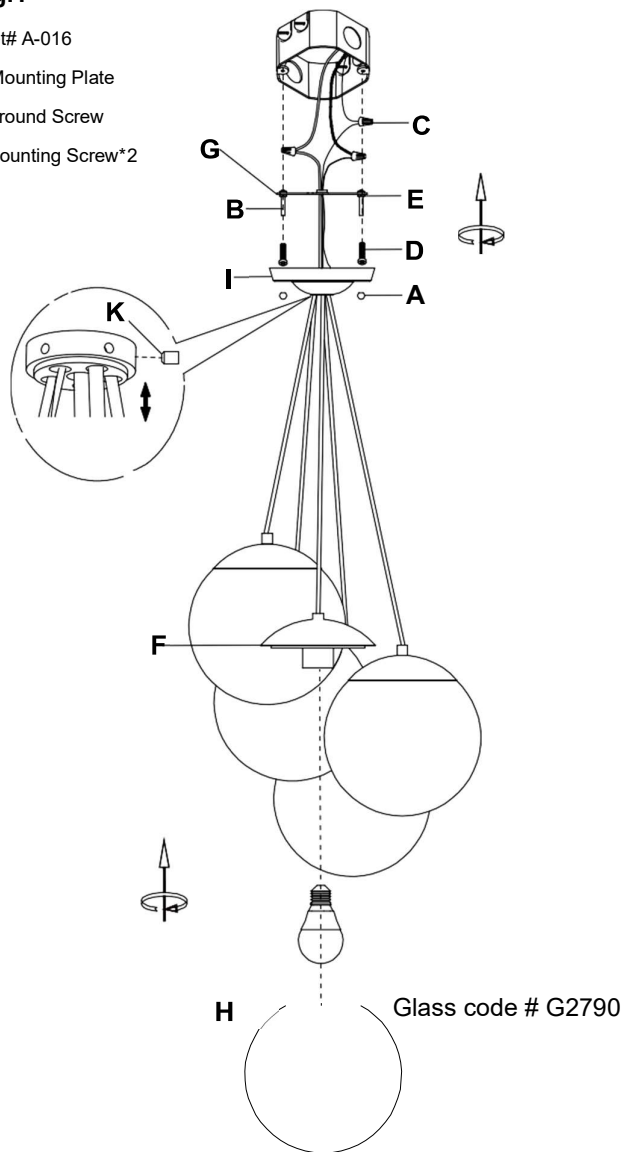


Fig.2



2745-695/66A

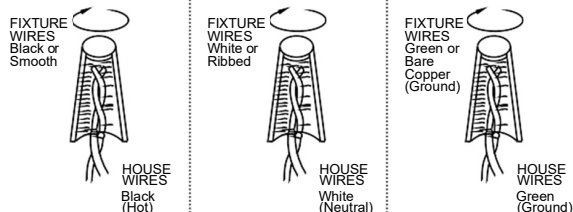

american
lighting
association