

# INSTALLATION INSTRUCTIONS

Item#2975-860

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1 & Fig.3)

3. Determine the desired hanging height. Pass the wires carefully through rods (E1, E2) and swivel (D), thread rods (E1, E2) on coupling of fixture (F) and secure rods (E1, E2) on swivel (D) of canopy (C).

### CONNECTING THE WIRES (Fig. 2)

4. Attach mounting plate (A) to the junction box (not included) with junction box screws (B) (Size: #8-32N\*L1"). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.
5. Support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (I) on the end of support cable into a slot located on mounting plate (A). Carefully allow support cable to support weight of fixture while wiring (Fig.1 Fig 3).
6. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the green screw provided. Tuck the wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

7. Raise canopy (C) to junction box and secure with mounting screws (H).
8. Install (13) thirteen candelabra base bulbs up to 40 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Thread glass shades (G) on fixture (F). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

Set#A-020-145DA  
Mounting Plate x 1pc  
Ground Screw x 1pc  
Junction box Screw x 2pcs

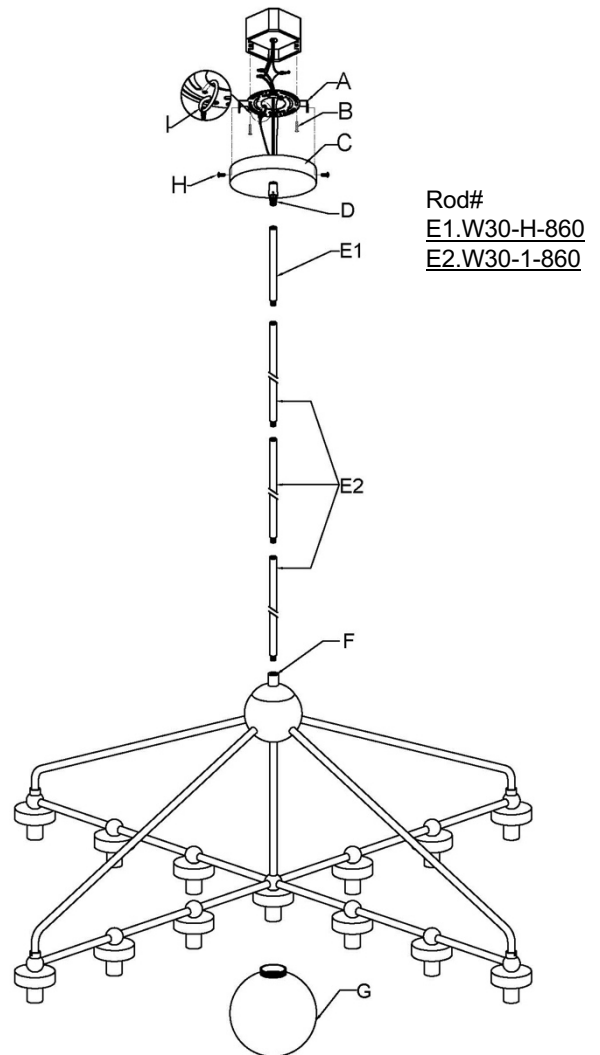
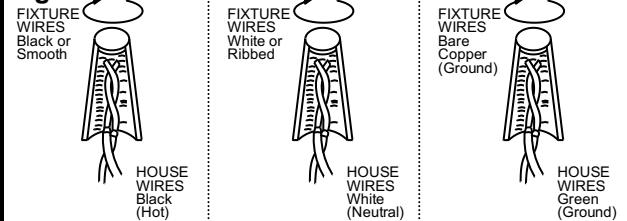
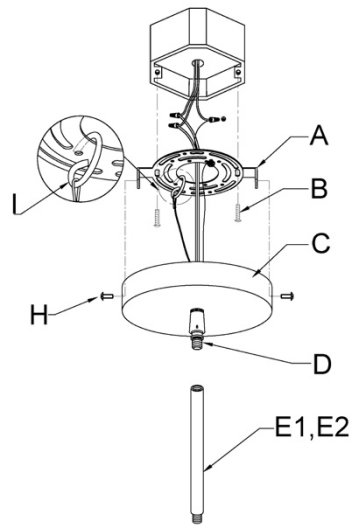


Fig. 2

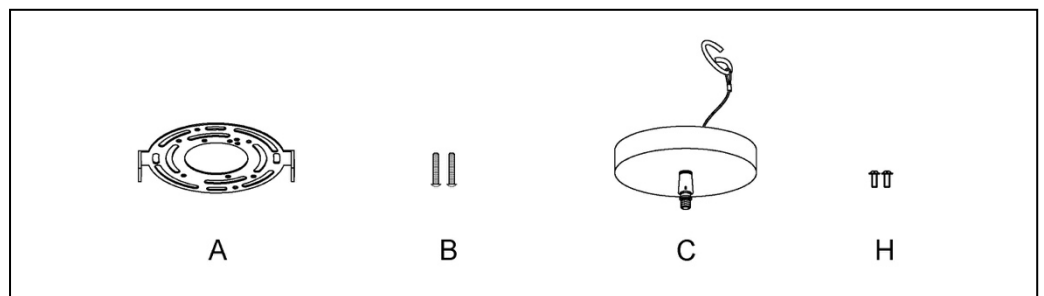


**Fig.3**



**a. Hardware Bag**

- A. Mounting Plate x1pc
- B. Junction Box  
Screw x 2pcs
- C. Canopy x 1pc
- H. Mounting Screw x 2pcs



**b. Hardware Bag**

- E1. Rod 6" x 1pc
- E2. Rod 12" x 3pcs

