

# INSTALLATION INSTRUCTION FOR 3616

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

READ AND SAVE THESE INSTRUCTIONS

## PREPARATION

1. Shut off the power at the circuit breaker box and, if necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## ASSEMBLING THE FIXTURE(Fig.1)

3. Slide center rod (I) along with wire and thread into coupling (J).
4. Tilt the main body (K) into metal frame (G). Slide the center hole of metal frame (G) over all thread (H), and secure with rod (F).

## MOUNTING THE FIXTURE (Fig.1)

5. Thread two mounting screws (A) (Size: #8-32\*1.4"L) into circular strap (B) spaced same distance apart as holes in canopy (D). Length of mounting screws (A) into circular strap (B) may be adjusted if necessary. Attach circular strap (B) to junction box (Not included) using junction box screws (C) (Size: #8-32\*0.6"). The side of circular strap (B) marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig. 2, making sure all wire connectors are secured. If your junction box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to circular strap using the green screw provided.
7. Tuck wire connections neatly inside the junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

8. Place canopy (D) over mounting screws (A) and secure with cap nuts (E).
9. Install glass panels (M) in sequence within the metal frame (G), and secure with plastic washers (O) and screws (M).
10. Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

**(DO NOT EXCEED THE SPECIFIED WATTAGE!)**  
**(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return the power to the junction box and test the fixture.

Fig.1

Set# A-020

- Circular strap
- Ground screw
- Mounting screws\*2
- Junction box screws\*2

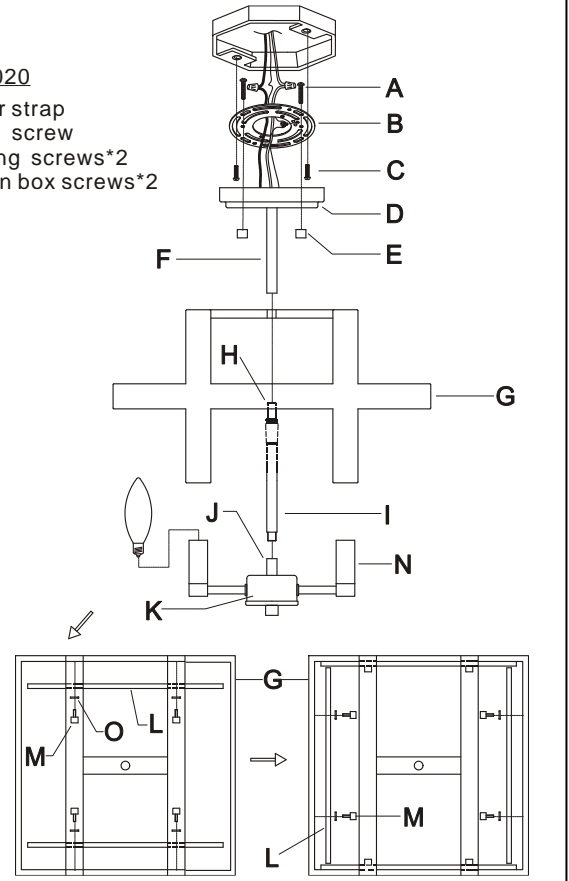


Fig.2

