

INSTALLATION INSTRUCTIONS FOR 3654-695

For SEMI-FLUSH

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Attach the circular strap (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the circular strap marked "GND" must face out.
4. Run the wire through tube (G), swivel (F) in sequence. Thread tube (G) onto all thread of the fixture body. Install the swivel (F) onto all thread of tube (G).

CONNECTING THE WIRES (Fig.2)

5. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw (B) provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

7. Align the canopy (D) over circular strap (A) and secure with screws (E).
8. Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**)
9. Insert the screw (N) with plastic washer (M) into the glass (K) hole and lock it with the rod (J) and plastic washer (M) provided, so the glass (K) is fixed on rod (J). Thread the other side of rod (J) onto fixture body (I) tightly as shown in Fig.1. Repeat the same process for the other rods. Note: Install the first- and third-layer rod (J), then install the second layer rod (L). (The first layer rod length 86mm has 8pcs. The second layer rod length 96mm has 8pcs. The third layer rod length 86mm has 8pcs.)

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

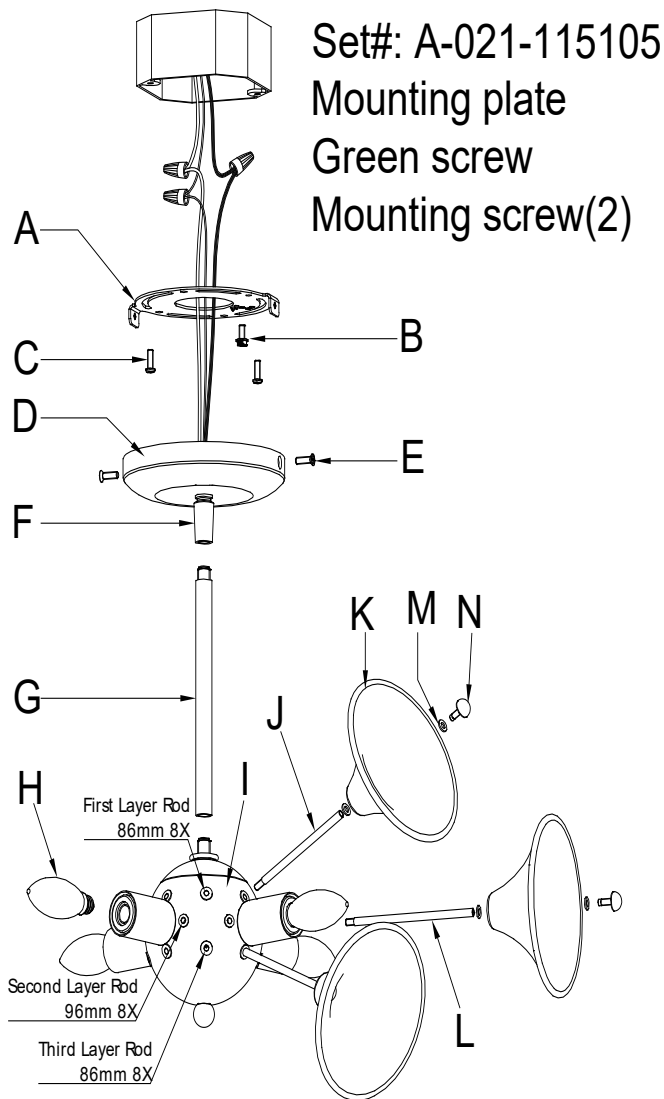


Fig.2

