

INSTALLATION INSTRUCTIONS

Item#3687-886 (New. 2024/12/13)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Install stem (J) onto the nipple of the fixture (K).
4. Determine the desired hanging height and thread rods (I & H) to coupling on stem (J). Carefully feed wires through each rod as you assemble. Note: Remove the all thread, if installing with one 6" rod only.
5. Install the swivel (E1) onto the top of rod (H).
6. Place strip plate (E2), the canopy (E), support cable (F) and lock washer (E3) over the swivel (E1), secure with the hex nut (E4).
7. Thread all thread into crossbar (A), then use lock washer and hex nut (C) to secure all thread into the crossbar. Note: The length of all thread into crossbar may be adjusted if necessary.
8. Take the crossbar assembly and mount it to ceiling outlet box (Not included) with mounting screws (B) (Size: #8-32N*L1"). The side of crossbar marked with "GND" must face out.
9. The support cable (F) is provided to support the weight of the fixture while wiring. Align the fixture to crossbar (A) and attach hook on the end of support cable (F) into a slot located on crossbar (A). Carefully allow the support cable (F) to support the weight of the fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to crossbar (A) using the ground screw provided.
11. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)

12. Raise canopy (E) over all thread and secure with nut (D) and decorative cap (G).
13. Install (8) eight candelabra base bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**

Fig. 1

Set#A-012-47
-Mounting Screw*2
-Ground Screw*2
-Crossbar*1

6" Rod#W30-H-870
12" Rod#W30-1-870
Candle Cover#CCV21048P-886


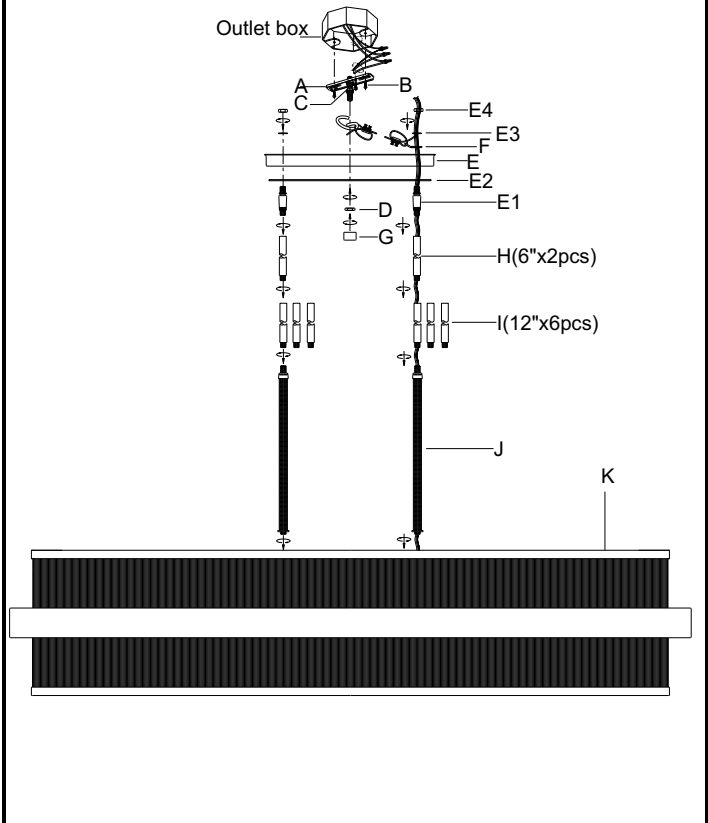


Fig. 2



3687-886

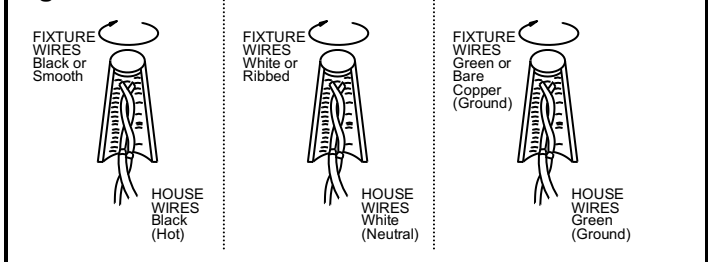

Page 1/2

american lighting association

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Replace swivel to be loop system (Fig.3)

1. Unscrew the nut (E4), then remove lock washer (E3), support cable (F), swivel (E1), strip plate (E2) and rod (H) from the canopy (E).
2. Attach one loop (M) to another loop (M) by using quick link (N).
3. Install one loop (M) onto the top of rod (H).
4. Place another loop (M) over strip plate (E2), then place the canopy (E), support cable (F) and lock washer (E3) onto the protruding nipple at the top of loop (M), securing with hex nut (E4).

