

INSTALLATION INSTRUCTIONS FOR 3742-732

For WALL SCONCE

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

ASSEMBLING THE FIXTURE (Fig.3)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.

SELECT INSTALLATION DIRECTION (Fig.1)

3. There are two directions to install this fixture. The current installation is the right one (Fig.1). If you do not need to change the installation direction, please ignore step four. If you choose the left one, please follow the steps to change it.

CHANGE INSTALLATION DIRECTION (Fig. 2)

4. The fixture can be rotated as a mirror image by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details.
 - A. Loosen screws (D) and remove the mounting plate (A). Loosen hex nut (H) and key washer (I) and remove the backplate (E) and the tube (O).
 - B. Loosen screws (L) using wrench (K) (Included). Then pull and rotate arms (M&N) 180° to the left, and lock with screws (L). Then rotate joint (J) 50° to the left.
 - C. Reinstall the parts disassembled in Step A.

ASSEMBLING THE FIXTURE (Fig.3)

5. Attach the mounting plate (A) to the junction box (not included) using mounting screws (B) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig.4)

6. Connect the electrical wires as shown in Fig.4, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (C) provided. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

7. Align the fixture (E) over mounting plate (A) and secure with screws (D).
8. Install (2) two candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSNCE NOMINALE MAXIMLE!**)
9. Rotate the glass (F) to the fixture (G). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

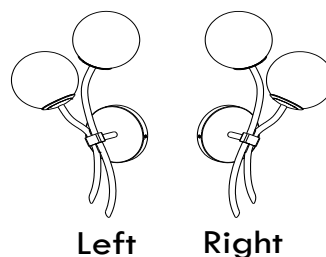


Fig.2

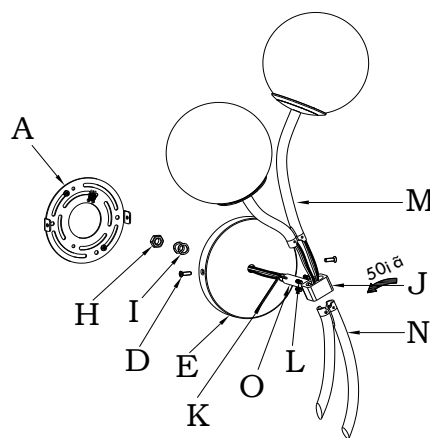


Fig.3

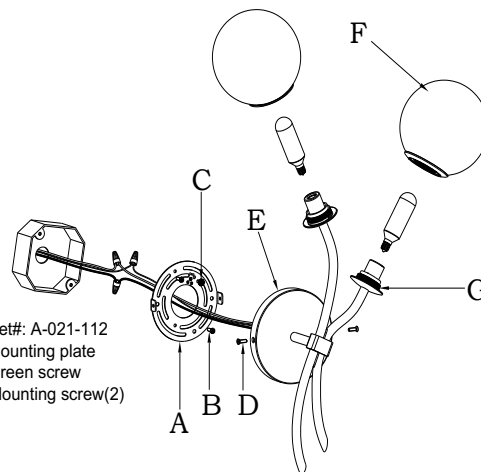


Fig.4

FIXTURE WIRES Black or Smooth		FIXTURE WIRES WHITE OR RIBBED		FIXTURE WIRES Green or Bare Copper (Ground)	
HOUSE WIRES Black (Hot)		HOUSE WIRES White (Neutral)		HOUSE WIRES Green or Bare Copper (Ground)	

