

INSTALLATION INSTRUCTIONS FOR 3747-732

For ISLAND LIGHT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Position the mounting plate (A) on the ceiling and mark the location of the two drywall anchors (D). Pre-drill the holes for the drywall anchors (D). Then insert the drywall anchors (D) into the ceiling.
4. Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (E) through the holes of the mounting plate (A) and lock them into the drywall anchors (D) to secure the mounting plate (A) to the ceiling.
6. Adjust the cord to reach the height of the fixing device you need and secure with screw (H). (Use the provided hex wrench (K).) To straighten the cord, please use a blow dryer (not included) if necessary.

CONNECTION THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (B) provided.

FINISHING THE INSTALLATION (Fig. 1)

8. Align Fixture (G) onto mounting plate (A) and secure with screws (F).
9. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSNCE NOMINALE MAXIMLE!**)
10. Rotate the glass (J) to the fixture (I). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

The fixture is over 10 lbs. Please remove all glasses before removing canopy from mounting plate to inspect wire connections in the future. This will allow you to hold the fixture body during wire connection or inspection or fixture removal.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set#: A-021-720121
Mounting plate
Green screw
Wood screw (2)
Drywall anchor (2)
Mounting screw(2)

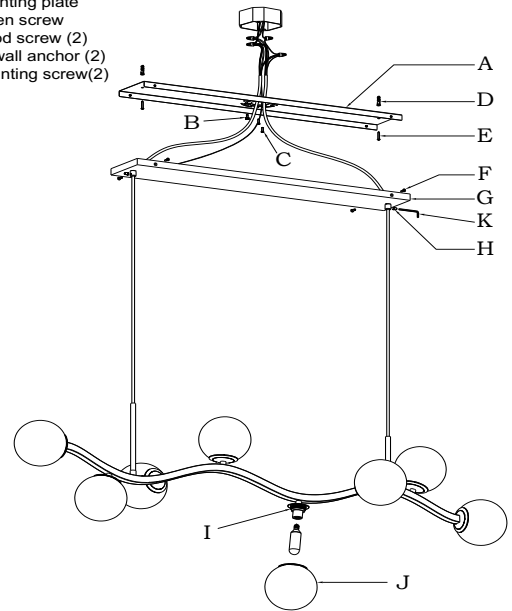


Fig.2

FIXTURE WIRES Black	FIXTURE WIRES White	FIXTURE WIRES Green or Bare Copper (Ground)
HOUSE WIRES Black (Hot)	HOUSE WIRES White (Neutral)	HOUSE WIRES Green or Bare Copper (Ground)

