

# INSTALLATION INSTRUCTIONS

Item#3804-899

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Secure fixture ring (N) onto all thread of fixture body (J).

4. Determine the desired hanging height and use a pair of proper chain pliers to remove and discard the excess chain.

5. Attach quick link (H) to fixture loop (N) and one end link of chain (I). Quick link must be completely closed when installed.

6. Lace the fixture wires through the chain. Slip screw collar ring (G) over the chain followed by the canopy (C) and allow them to rest on fixture loop (N).

7. Install the crossbar (A) with nipple (D), lock nut (M) and screw collar loop (F) to the junction box using two junction box screws (B). The side of crossbar (A) marked "GND" must face out. The length of nipple (D) maybe adjusted if necessary. Attach another quick link (H) to the screw collar loop (F) and another end link of chain (I), then close the quick link (H). Feed the fixture wires through the collar loop (F) and the nipple (D).

### CONNECTING THE WIRES (Fig. 2)

8. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the crossbar (A) using the green screw (E) provided.

9. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

10. Raise the canopy (C) to the ceiling and secure in place by screwing the screw collar ring (G) onto the screw collar loop (F).

11. Install (4) four candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig.1

Set#A-016

-Crossbar

-Ground Screw

-Junction Box Screw\*2

Candle cover#CCV21105P-899

Chain#HCH2072-899




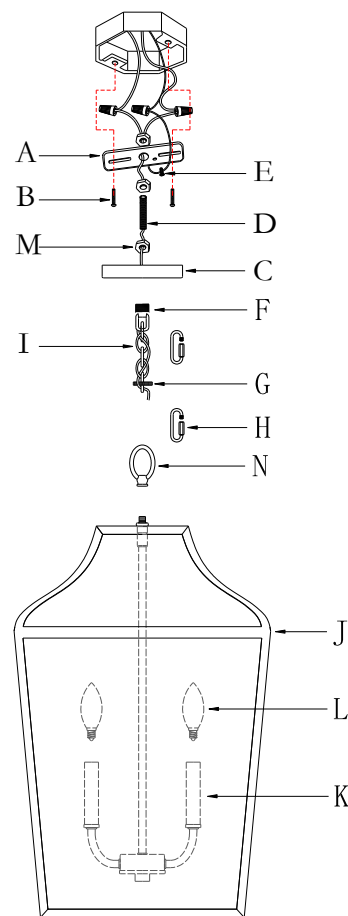



Fig. 2





Notice: It is important to use proper chain pliers (not included)  
 To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig.3

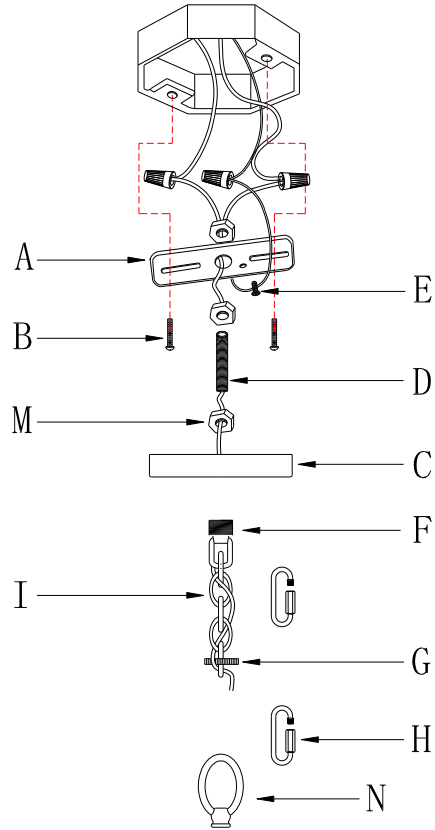

**a. Hardware Bag:**

- A. Crossbar\*1
- B. Junction box Screw\*2
- C. Canopy \*1
- D. Nipple\*1
- E. Ground screw\*1
- F. Screw collar loop\*1
- G. Screw collar ring\*1
- H. Quick link\*2
- I. Chain\*1
- M. Lock nut\*3
- N. Fixture loop\*1

