

INSTALLATION INSTRUCTIONS

Item# 6709-66 (New. 2024/07/05)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Align the hole on the shape plate (T) to the hole on the third-tier ring (R), securing with screws (U).
4. Align the top hole of the shape plate (T) to all thread of the second-tier ring (Q), securing with finial (S).
5. Install rod (P) onto second tier ring (Q), then attach first tier ring (O) by threading onto rod (P) as shown in (Fig.1).
6. Determine the desired hanging height and thread rods (N & M) to coupling on first tier ring (O). Carefully feed wires through each rod as you assemble. Note: Remove all thread, if installing with one 6" rod only.
7. Install loop (L) onto the top of rod (M).
8. Install a 1/4" IPS pipe (A) (Not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown.
9. Secure hex nut (B) onto the 1/4" IPS pipe (A) (Not provided) and then secure lock washer (C) and hickey (D) tightly.
10. Thread lock washer (C) and hex nut (B) onto all thread (F), then thread all thread (F) into the hickey (D); and secure with hex nut (B) on the other end of all thread (F). Thread lock washer (C) and ceiling loop (J) onto all thread (F). The all thread (F) may be adjusted if necessary.
11. Open quick link (K) and attach to loop (L), slip lock collar (G) and canopy (H) over quick link (K), then allow lock collar (G) and canopy (H) to rest on top of loop (L).
12. Connect loop (L) and ceiling loop (J) with quick link (K), then close quick link (K).
13. Feed the fixture's wires and safety cable (E) through quick link (K), lock collar (G), canopy (H) and all thread (F) and allow wires to exit through the side of hickey (D). Run safety cable through the hickey (D) and secure safety cable with set screw assembly and set screw provided. (Fig.1).

CONNECTING THE WIRES (Fig. 2)

14. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)

15. Raise canopy (H) onto ceiling loop (J) and secure with lock collar (G). (Fig.1)

Fig. 1

6" Rod#
12" Rod#


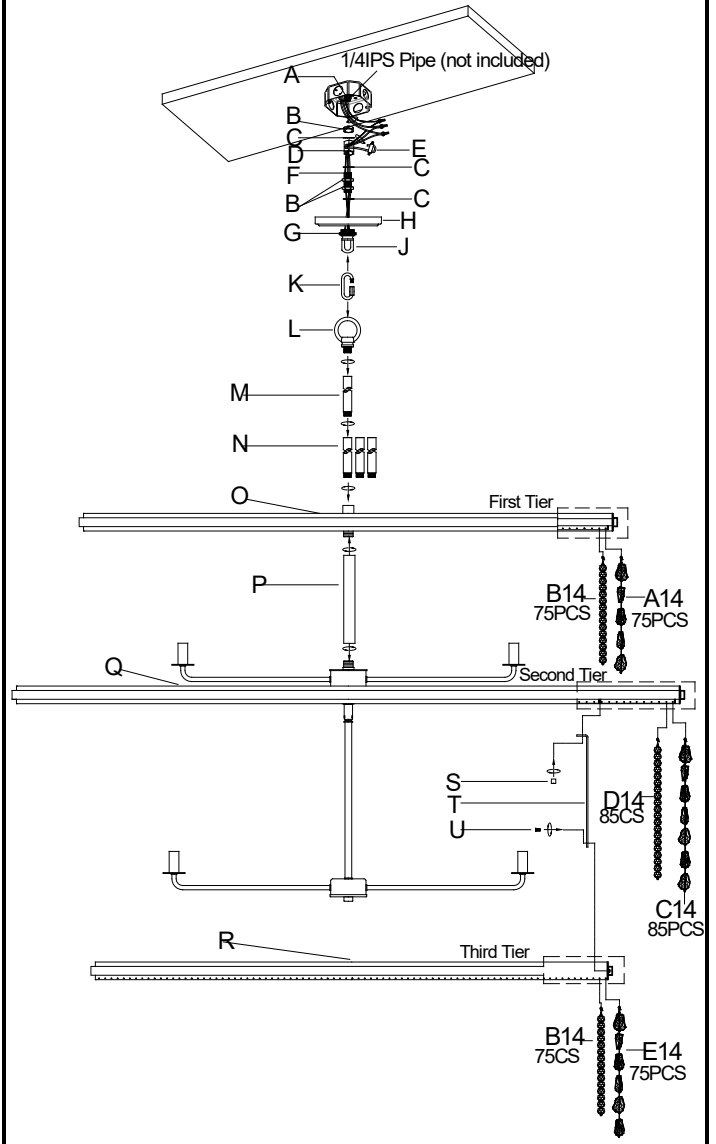


Fig. 2

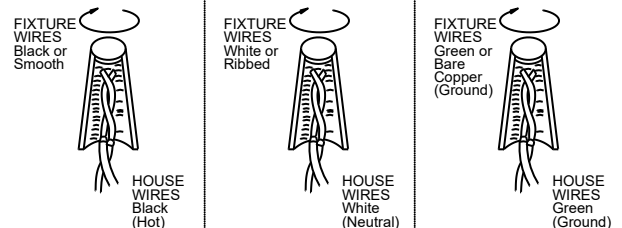

16. Install (14) fourteen candelabra base bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
17. Hook natural stone string (E14) and crystal string (B14) to third tier ring (R) cyclically.
18. Hook natural stone string (C14) and crystal string (D14) to second tier ring (Q) cyclically.
19. Hook natural stone string (A14) and crystal string (B14) to first tier ring (O) cyclically.

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

WARNING: This luminaire must be mounted or supported independently of an outlet box.

