

# INSTALLATION INSTRUCTIONS

For Model 73345-66

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Separate the top cover (E) by loosening two screws (D). Install (4) four candelabra base bulbs (C) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
4. Re-attached the top cover (E) and secure with two screws (D).

## CONNECTINE THE WIRES (Fig.2)

5. While supporting the fixture, connect the electrical wires as shown in figure 2. If your post has a ground wire (green or bare copper), connect fixture ground wire to it. If not, consult your electrician for proper grounding.
6. After the wires are connected, tuck them carefully inside the post cup (A).

## COMPLETING THE INSTALLATION (Fig. 1)

6. Place the fixture onto post cup (A) and secure with screws (B).

**Your installation is now complete. Return power to the junction box and test the fixture.**

Fig. 1

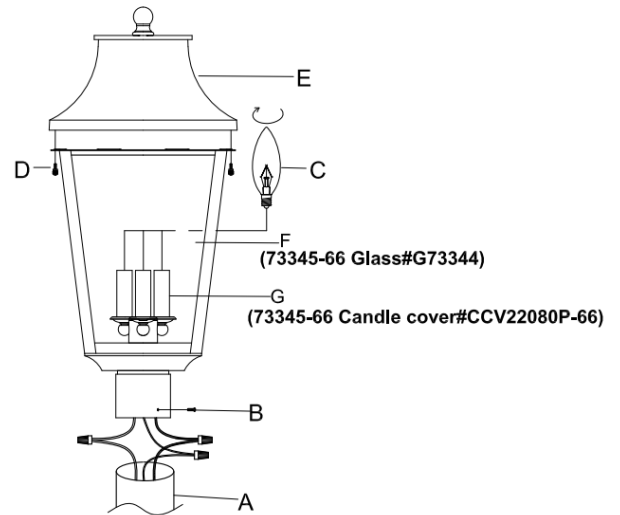


Fig. 2

