

INSTALLATION INSTRUCTIONS

Item#N1722-84

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Thread mounting screws (I) into the pre-drilled holes in mounting plate (A), spaced the same distance apart as the holes in the backplate (E), the length of mounting screws (I) may be adjusted if necessary.
4. Attach the mounting plate (A) to outlet box (Not included) using the outlet box screw (C). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES

5. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors (F) are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.

COMPLETING THE INSTALLATION

6. Attach the backplate (E) to the mounting screws (I) and secure with round nut (H).
7. Install (2) two candelabra base bulbs (J) up to 40 watts or CFL or LED equivalent (not included) in accordance with the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
8. Attach the frame (D) to backplate (E) from top to bottom according to Fig.1 illustration.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


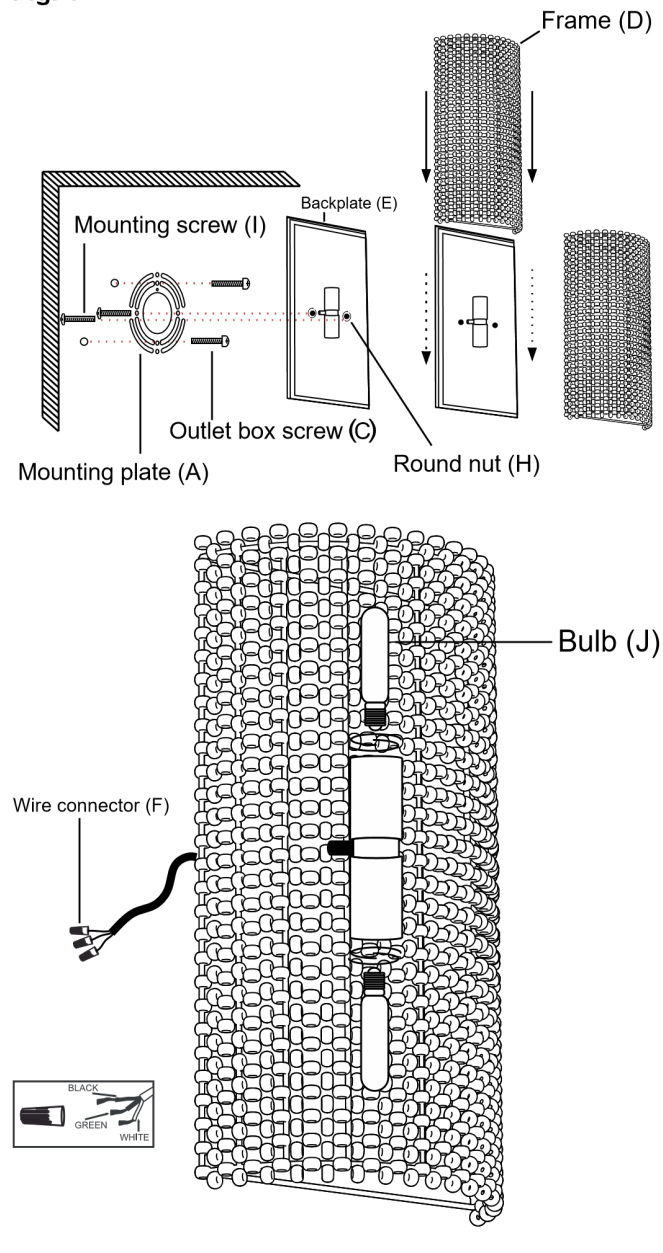


FIG.2

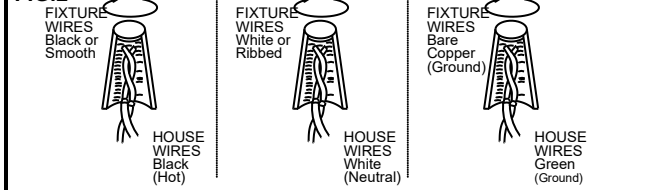

american
lighting
association