

INSTALLATION INSTRUCTIONS

Item# N1862-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small parts necessary for installation.

MOUNTING THE FIXTURE

3. To begin, it will be necessary to disassemble the fixture by first, unscrew the flat head screw (H) at the top and bottom in order to separate the frame (G) from back plate (E). Second, remove mounting plate (A) from back plate (E) by removing ball nuts (D) located on front of the back plate.
4. Install mounting plate (A) to junction box (JB) **“not provided”** using 8-32 screws (B). Make sure mounting plate and backplate is straight when placing a level across the top. Adjust mounting plate and tighten screws (B) to secure mounting plate, The side of mounting plate (A) with **“GND”** marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wire as shown in Fig. 2, make sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect the fixture's ground wire to it. Otherwise connect the fixture ground wire directly to the mounting plate (A) using green screw provided.
6. Tuck wire connections neatly into junction box (JB).

FINISHING THE FIXTURE

7. To mount the fixture to the wall, first slip the two mounting screws (C) through the mounting holes (F) in the back plate (E)
8. While holding fixture in place, thread the two ball nuts (D) at the end of the mounting screws (C), and tighten.
9. Install 2x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.
10. Install the frame (G) and lock with the screw (H) that was removed earlier at the top and bottom of the frame (G) and tighten.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

MIN OF 75°C SUPPLY OF CONDUCTORS
LES FIL D' ALIMENTATION 75°C MIN.

Fig.1

Set# A-
-Mounting
-Ground screw
-Mounting Screw *2

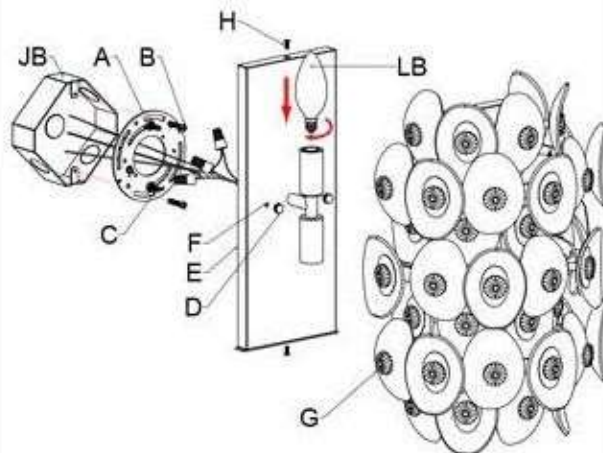


Fig. 2

