

# INSTALLATION INSTRUCTIONS

Item#N1998-732 / N1998-A-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install a 1/4" IPS pipe (A) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box (not included) as shown.
4. Secure the hex nut (B) onto the pipe (A) and then secure the hickey (C) tightly.
5. Thread nipple (D) into hickey (C) and tighten with hex nut (B), then thread ceiling loop (E) on the other end of nipple (D) and secure with hex nut (B). The length of nipple (D) maybe adjusted if necessary.
6. Decide the preferred hanging height and choose the correct length of rods (J, K, L and M) needed. Feed fixture wire up through the rods (J, K, L and M), screw the rods (J, K, L and M) onto coupling (N).
7. After screw the rods (J, K, L and M), secure the set screws on coupling (N) by Allen wrench (O) provided.
8. Slip the collar ring (I) and canopy (H) down over end of rods.
9. Raise the fixture up to the ceiling and connect the fixture loop (G) to ceiling loop (E) with quick link (F).
10. Feed the fixture wires and safety cable through the fixture loop (G), quick link (F), ceiling loop (E) and nipple (D), and allow them to exit through the side of hickey (C). Run safety cable through the hickey (C) one circle and secure safety cable with set screw assembly and secure with set screw provided.

### CONNECTING THE WIRES (Fig. 2)

11. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it.
12. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

13. Carefully raise the canopy (H) up to ceiling, secure with collar ring (I).
14. Install (13) thirteen candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
15. Starting from the bottom of fixture body (P) to installing glasses for more convenience. Attach the glass (Q) onto the hook of fixture body (P).

**THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.**

Your installation is now complete. Return power to the junction box and test the fixture.


**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig.1**

Rod#W39-5H-732

Rod#W39-5-732

Allen Wrench#WRH-L-M4

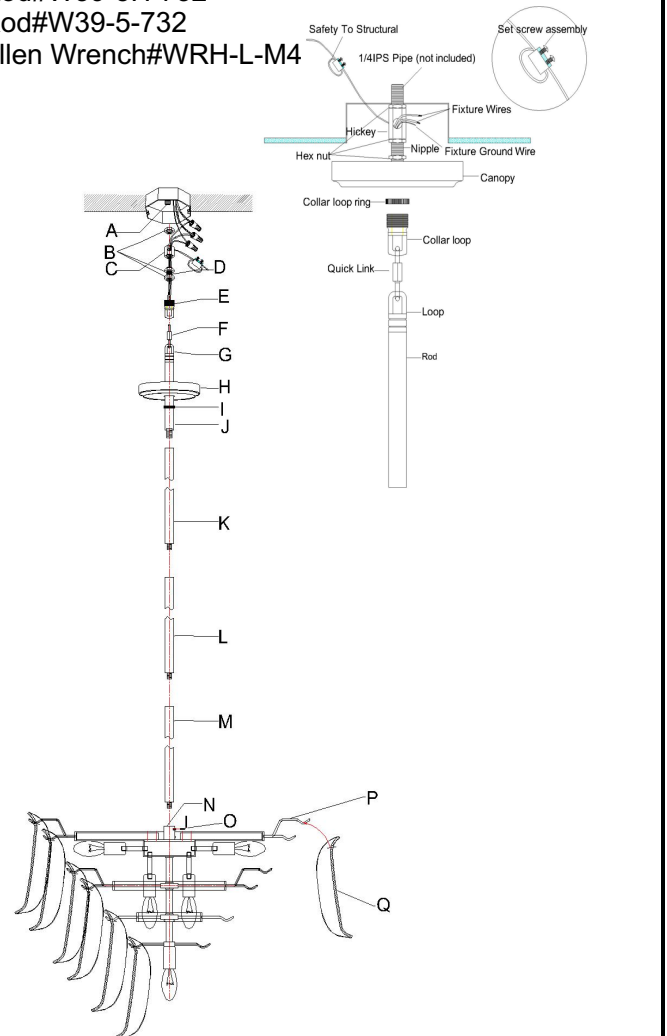

**Fig. 2**

