

INSTALLATION INSTRUCTIONS

Item#N2089-860

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine the desired hanging height and select the correct rods (I,J,K and L). Carefully push fixture wires from top of fixture up through the rods (I,J,K and L), screw the rods onto the frame (M). Slip collar ring (H), decorative plate (E) and canopy (D) down over end of rods (I,J,K and L). Pass the fixture wires through swivel (G), collar screw (F) and nipple (C), thread swivel (G) onto the rods, thread nipple (C) of crossbar assembly into collar screw (F).
4. Attach crossbar assembly to the junction box (not included) with mounting screws (B) (Size: #8-32N*L1/2"). The side of the crossbar (A) with "GND" marked on it and two convex points must face out. The length of nipple (C) into crossbar (A) maybe adjusted if necessary.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar (A) using green screw provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Raise canopy(D) and decorative plate (E) up to ceiling, then secure them with collar ring (H).
8. Install (16) sixteen candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Screw glass shade (N) onto the frame (M). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Page: 1/1

Fig.1

Set#A-012-46B

-Cross bar

-Ground screw

-Mounting screws(2)

Rod#W35-H-860(6")

Rod#W35-1-860(12")

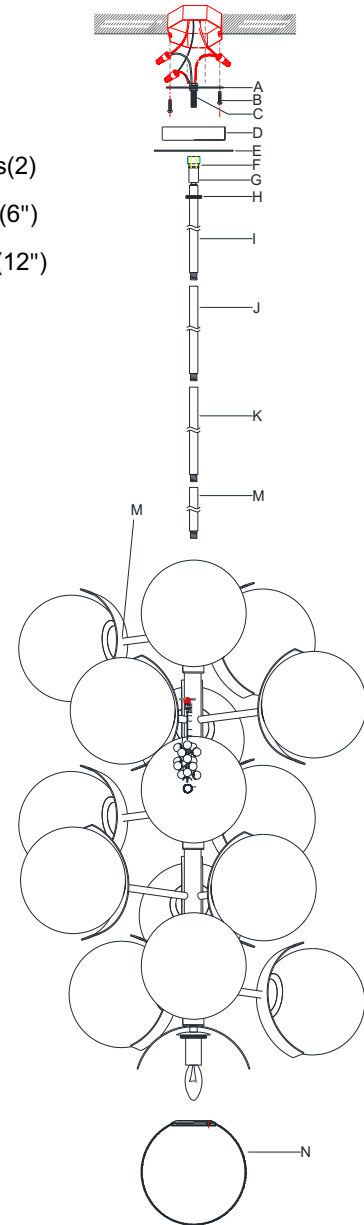


Fig. 2

FIXTURE WIRES
Black or
Smooth



HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
White or
Ribbed



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Bare
Copper
(Ground)



HOUSE WIRES
Green
(Ground)



american
lighting
association