

INSTALLATION INSTRUCTIONS

Item#N2288-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install a 1/4" IPS pipe (Q) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box (not included) as shown
4. Secure the hex nut (A) onto the pipe (Q) and then secure the hickey (B) tightly.
5. Position mounting plate (E) over ceiling and mark location of four holes on mounting plate (E) where plastic anchors (D) will be inserted. Drill holes into ceiling and insert plastic anchor (D).
6. Determine desired height of fixture. Press buttons on canopy (H) to release cable(J). Carefully pull on each cable to adjust length of cable.
7. Feed the fixture wires and safety cable (C) through mounting plate (E), and allow them to exit through the side of hickey(B). Run safety cable through the hickey(B) one circle and secure safety cable with set screw assembly and secure with set screw provided.
8. Attach mounting plate (E) to the junction box (not included) secure with mounting screws (G) (Size: #8-32N*L1/2"). The side of the mounting plate (E) with "GND" marked on it and two convex points must face out. And install the four wood screws (F) into the plastic anchors(D).

CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (E) using green screw provided.
10. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Carefully raise the canopy (H) up to ceiling, secure with cap nuts(I) and hex nuts (Q).
12. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Attach glass (L) and glass(P) onto the frame(K) with screws (N) and washer (M) provided. Glass (P) needs to be installed at both ends of the frame(K).

**—DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE
MAXIMALE!)**

Fig.1

Set#A-022-150

- Mounting plate
- Ground screw
- Wood screws(4)
- Plastic Anchors(4)
- Mounting screws(2)


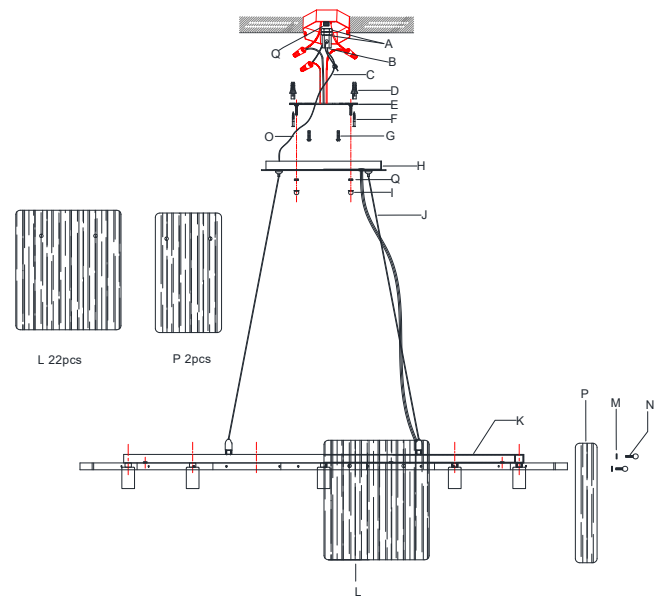


Fig. 2



Warning: This luminaire must be mounted or supported independently of an outlet box.

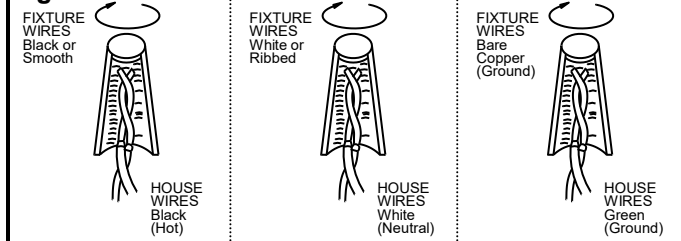