

INSTALLATION INSTRUCTIONS

For item#N5362-XXX (New. 06/06/2024)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Thread rod and socket assembly (F) onto all thread (E) on bottom of canopy (C).
4. Attach mounting plate (A) to outlet box (Not included) with mounting screws (B) (Size: #8-32N*L0.5"). The side of the mounting plate marked "GND" with two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (A) using green screw provided.
6. Tuck wire connectors neatly into outlet box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Place canopy (C) over mounting plate (A) and secure with screws (D).
8. Install (1) one candelabra base bulb (H) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Twist glass shade (I) to socket (G) until snug. Do not over tighten.

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1

- Set#A-021-118DL
- Mounting Plate
 - Ground Screw
 - Mounting Screw *2

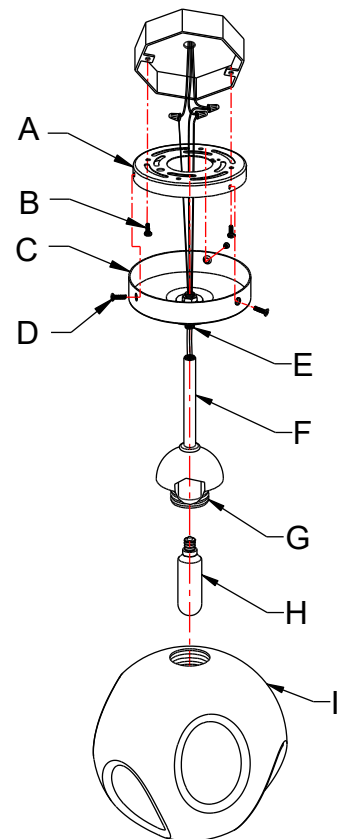


Fig. 2

