

# INSTALLATION INSTRUCTIONS

Item#N5365-XXX (New. 06/06/2024)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Secure rod (I) onto all thread (G) on top of fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread on top of rod (I). Attach canopy (C) by threading onto rod (F1). Carefully feed wires through each rod as you assemble.
5. Position mounting plate (A) to ceiling and mark the location of the three drywall anchors (E). Pre-drill holes and insert drywall anchors (E) into ceiling.
6. Attach mounting plate (A) to outlet box (Not included) with mounting screws (B) (Size: #8-32N\*L0.5"). The side of the mounting plate (A) marked "GND" with two convex points must face out.
7. Screw woodscrews (H) through mounting plate (A) into drywall anchors (E) to secure mounting plate (A) to ceiling.
8. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (O) on the end of support cable (R) to a slot located on mounting plate (A). Carefully allow support cable (R) to support weight of fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
10. Tuck wire connectors neatly into the junction box.

### FINISHING THE INSTALLATION (Fig.1)

11. Place canopy (C) over mounting plate (A) and secure with screws (D).
12. Install (25) twenty-five candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Twist large glass shade (K1) and small glass shade (K2) to socket (L) until snug. Do not over tighten. Note: Install small glass shade (K2) to the shortest tube which labeled "Glass shade (K2)".


Your installation is now complete. Return power to outlet box and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**


**Fig. 1**

Set# A-021-194D

- Mounting Plate
- Ground Screw
- Mounting Screws\*2

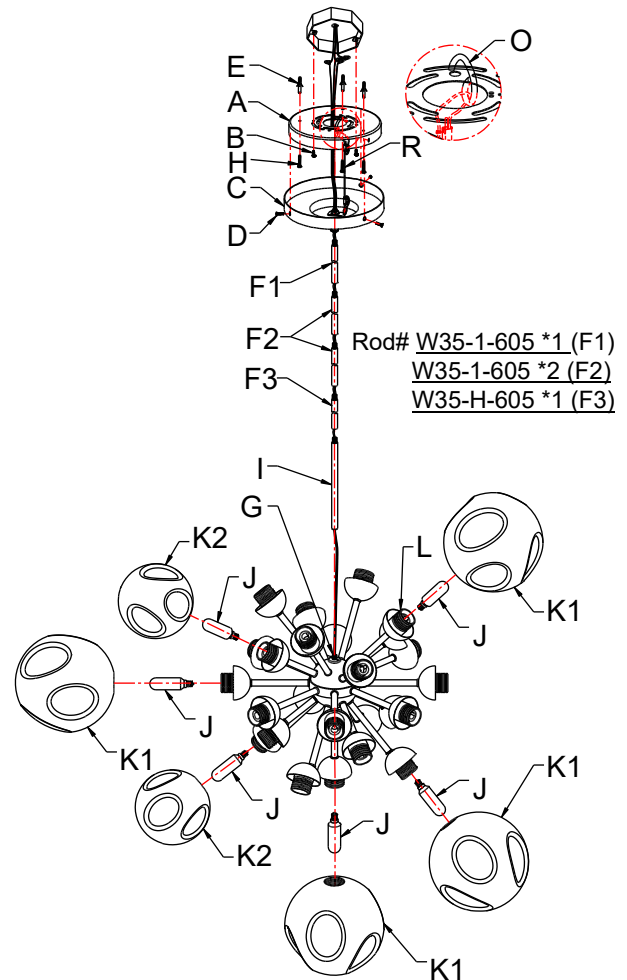

**Fig. 2**

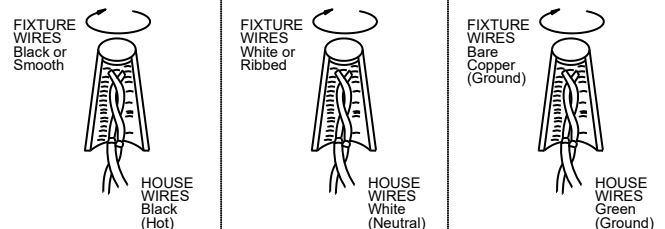

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

LA-3762E

