INSTALLATION INSTRUCTIONS

Item #N801908

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING THE FIXTURE

- 1. Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
- 2. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.

MOUNTING THE FIXTURE (Fig.1)

3. Install the cross bar to the junction box. Then thread the all thread to the cross bar.


CONNECTING THE WIRES (Fig. 2)


- 4.At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the screw provided.
- 5. Tuck wire connectors neatly into outlet box.

FINISHING THE INSTALLATION (Fig.1)

- 6. To mount the fixture to the ceiling, insert the all thread through the fixture. Use the decorative knob to tighten the fixture securely to the ceiling.
- 7. Attach the glass shade (A) onto the socket (B) of the fixture body, and then lock it securely with the socket ring (C).
- 8. Install candelabra base bulbs up to 42 watts each or LED equivalent (not included) in accordance with the fixture specification.
 - —DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the outlet box and test the fixture.

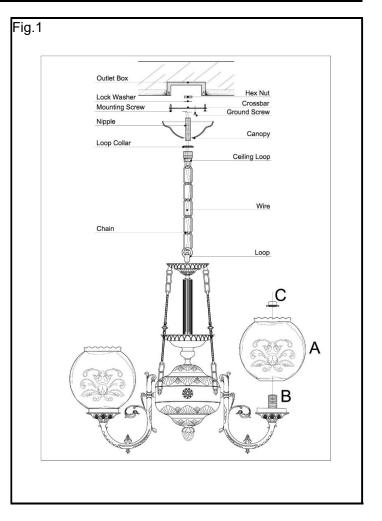

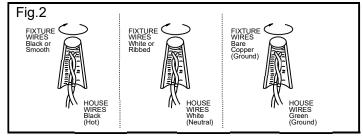

Note: Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean the metal parts of your light fixture with water or cleanser.