

INSTALLATION INSTRUCTIONS

Item# N1863-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small parts necessary for installation.

MOUNTING THE FIXTURE

3. To begin, it will be necessary to remove mounting plate (A) from canopy (E) by removing ball nuts (D) located on front of the canopy (E).
4. Attach mounting plate (A) to the junction box (JB) **“not provided”** with junction box screws (B). The side of mounting plate (A) with **“GND”** marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wire as shown in Fig. 2, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect the fixture's ground wire to it. Otherwise connect the fixture ground wire directly to the mounting plate (A) using green screw provided.
6. Tuck wire connections neatly into junction box (JB).

FINISHING THE FIXTURE

7. Your fixture is supplied with 3x sets of chain (ch), and the one set had wire laced through it.
8. To begin, slip the wire through one of the loop hook (2) at the canopy and hook the 3x sets of chain to both canopy (E) and the body frame (1).
9. To mount the fixture to the ceiling, first slip the two mounting screws (C) through the mounting holes (F) in the canopy (E)
10. While holding fixture in place, thread the two ball nuts (D) at the end of the mounting screws (C), and tighten.
11. Install the 3x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

Set# A-022

- Mounting plate
- Ground screw
- Mounting Screw *2

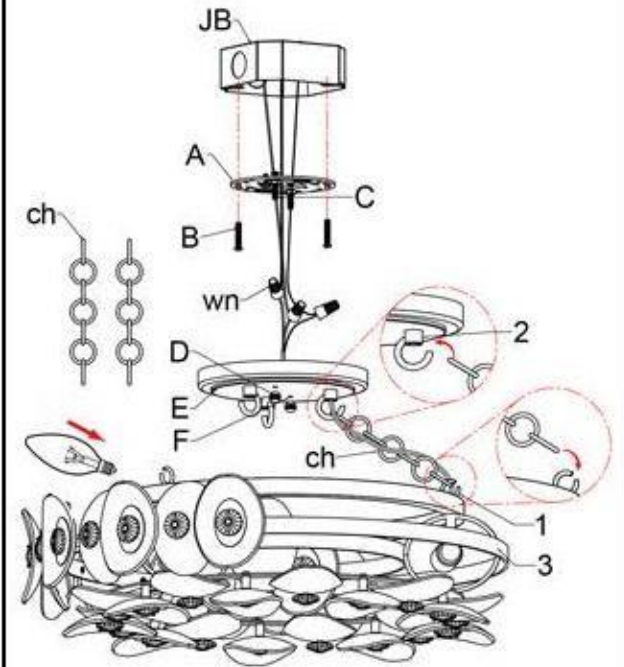


Fig. 2

