

INSTALLATION INSTRUCTIONS

Item#132-860

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE AND HANGING THE FIXTURE (Fig.1)

3. Determine the desired hanging height and remove the excess chain (F) with proper chain pliers.
4. Open one end of chain (F) and attach it to fixture loop (E1), then close chain. Open the other end of chain (F) and attach it to ceiling loop (E2), then close chain.
5. Carefully feed fixture wires through chain (F), loop (E2) and canopy (C) and pull tight.
6. Attach mounting plate (A) using mounting screws (B) (Size: #8-32N*L0.5") to junction box (Not included). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
8. Tuck the wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Place canopy (C) over mounting plate (A) and secure with screws (D).
10. Place metal shade (H) over socket (G) and secure with socket ring (I).
11. Install (1) one medium base bulb (J) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Fig. 1

Set# A-021-118DH

-Mounting Plate


-Ground Screw

-Mounting Screw *2

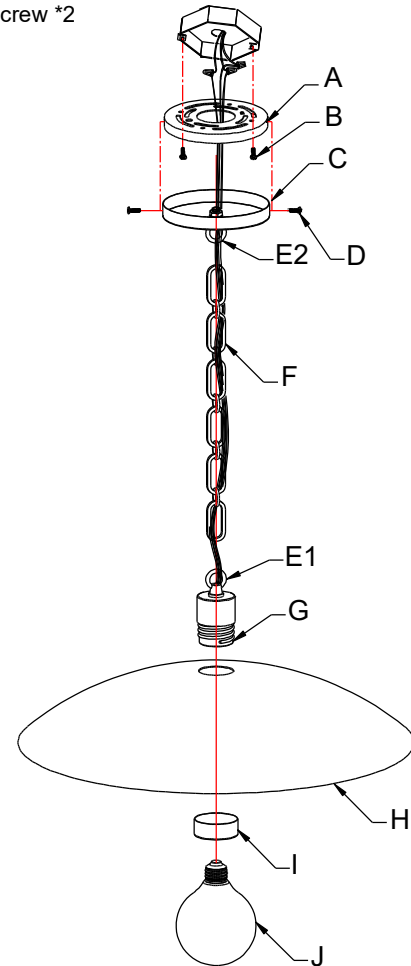

Chain# HCH7572-860

Fig. 2

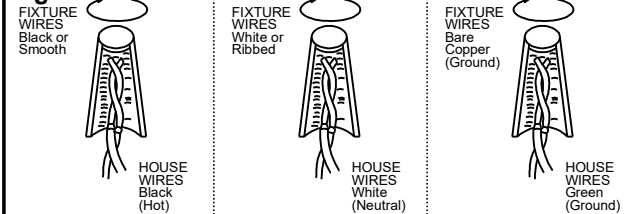

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american lighting association

LA-3785E